




Specification of Magnetic Powder Core

Mirrack
www.mirrack.com(CN)
www.mirrack.com.cn (EN)

Part Number	Product Series	Permeability (u)	A_L (nH/N ²)	Coating Color	Coating Material	Coating Breakdown Voltage
MKU330H-060	MKU	60	$51 \pm 8\%$	Brown	Epoxy	1.2KVac / 0.5mA / 3sec
Description	MKU Toroidal Core					

Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	1.300	33.00	1.332	33.83	Max
ID	0.785	19.90	0.760	19.30	Min
HT	0.345	8.76	0.382	9.70	Max

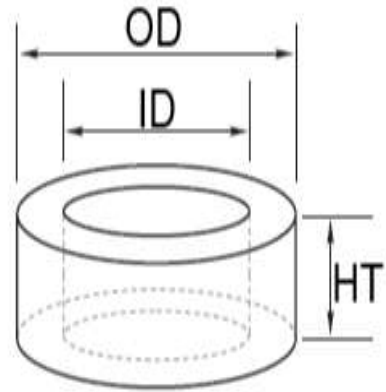

Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm ²)	Core Volume Ve (cm ³)	Window Area Wa (cm ²)	Weight (g)	Box QTY (pcs)
8.147	0.551	4.490	2.926	$28.5 \pm 5\%$	441

Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	Ø1.0 mm, 50TS, 100KHz, 1.0V, 0A	127.5uH±8%
DC-Bias	Ø1.0 mm, 50TS, 100KHz, 1.0V, $I_{DC(100\text{ Oe})} = 13.03\text{ A}$	60% Min
Core Loss	Ø1.0mm, 50TS, 50KHz, 1000Gauss	340mW/cm ³ Max
Hi-Pot	1.2KVac, 0.5mA, 3 sec	PASS

DC Bias Curves

