


	Specification of Magnetic Powder Core	Mirrack www.mirrack.com(CN) www.mirrack.com.cn(EN)
---	--	--

Part Number	Product Series	Permeability (u)	A _L (nH/N ²)	Coating Color	Coating Material	Coating Breakdown Voltage
MKF234-060	MKF	60	51±8%	Blue	Epoxy	800Vac / 0.5mA /3sec
Description	Toroidal Si-Fe Core					

Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	0.928	23.60	0.956	24.30	Max
ID	0.567	14.40	0.542	13.77	Min
HT	0.350	8.89	0.382	9.70	Max

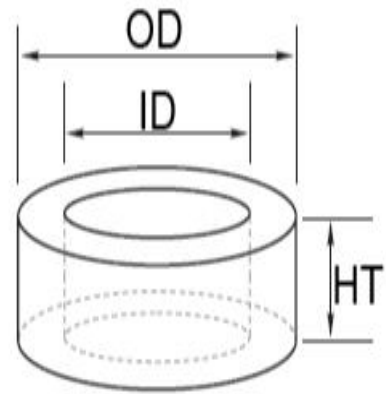

Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm ²)	Core Volume Ve (cm ³)	Window Area Wa (cm ²)	Weight (g)	Box QTY (pcs)
5.88	0.388	2.28	1.49	15.5±5%	1600

Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅0.5 mm, 50TS, 100KHz, 1.0V, 0A	127.5uH±8%
DC-Bias	∅0.5 mm, 50TS, 100KHz, 1.0V, I _{DC(100 Oe)} = 9.4 A	70%Min
Core Loss	∅0.5mm, 50TS, 50KHz, 1000Gauss	620mW/cm ³ Max
Hi-Pot	800Vac,0.5mA, 3 sec	PASS

DC Bias Curves

